

Vancouver-UBC Local Committee

October 15th, 2019

Topics

- Consultation Updates - Various
- Deep Dive Topics
 - Van Play
 - Prior Street Collector and Grade Separation

John Hendry Park (Trout Lake)



2015 Master Plan (not adopted)

Circulation Concept

The circulation system expands the pedestrian trail network and addresses current issues between active transportation and recreational trail users.

Note: Feedback from the public indicated further discussion on the location, extents and enclosure of the dog off-leash area is needed. The outcomes of this process will likely trigger the need for updates to the circulation concept.



13 E 14th ACTIVE TRANSPORTATION CONNECTION

- New link to existing route

18 PARK ENTRY FEATURE

- Major entry point
- Seating, signage, feature art, park map

15 MULTI-USE TRAIL TO COMMUNITY CENTRE

- Shared recreational uses (walking, cycling, etc.)
- Located to limit impacts on existing trees

18 PARK ENTRY FEATURE

- Signage, feature art

12 COMMUNITY CENTRE PARKING

- As existing
- Future improvements to capture, clean and divert run-off to Trout Lake

17 END OF TRIP CYCLING FACILITIES

- Covered secure parking
- Bike pump station

14 LAKE LOOP TRAIL

- Universally accessible, paved route
- Complete loop around lake
- Approximately 1.25 km long
- Could have distance markers for exercise

15 SOUTHWEST LOOP TRAIL

- Connected trail loop
- Approximately 1/2 km
- Could have distance markers for exercise

13 NORTH ACTIVE TRANSPORTATION CONNECTION

- Link to Lakewood Drive route
- Link to E 14th Ave. route
- Relocate 45 parking stalls from North Parking lot to E 19th Ave.

21 MEADOW WALK

- Narrow footpath
- Interpretive elements, lookout, seating areas, art and nature play
- Possible connection to naturalized woodland

15 NORTHEAST LOOP TRAIL

- New trail loop with views to meadow and naturalized woodland ecosystem areas
- Approximately 1/2 km
- Could have distance markers for exercise

12 NORTH PARKING LOT

- Market functions relocated to south parking lot
- 45 parking stalls relocated to E 19th Ave. to support Active Transportation Route Connection

18 PARK ENTRY FEATURE

- Circulation hub
- Seating, signage, park map

16 NATURE BOARDWALK

- Lookouts at lake edge
- Habitat viewing and interpretation
- Incorporated seating

12 EAST PARKING LOT

- As existing

13 ACTIVE TRANSPORTATION ROUTE

- Dedicated cycling only route forming part of BC Parkway route
- Low level lighting through park
- Increase separation from lake loop

18 PARK ENTRY FEATURE

- Major circulation hub
- Entry signage, park map, art


12 SOUTH PARKING LOT

- As existing
- Proposed location for Saturday Farmers' Market within the parking lot and along the entry road
- Space available: approx. 2,500 sq.m.

12 E 19TH AVENUE PARKING

- Allow parking on the park side of E 19th Avenue during farmers' markets and other events
- Approximately 75 spaces

Broadway Subway

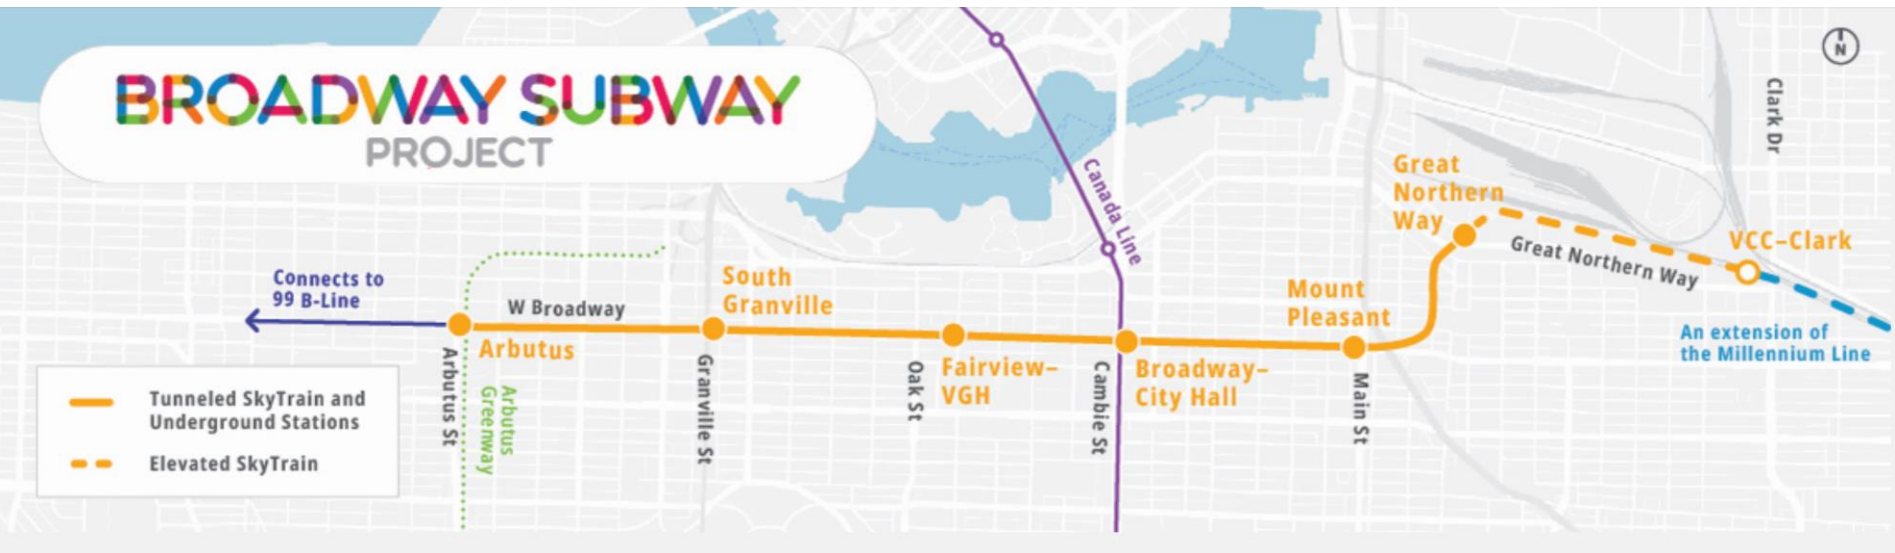


- Construction impacts:

- Great Northern Way Station
- Arbutus Station
- Along 10th especially including around Granville
- Along 7th especially from Granville to Fir

Great Northern Way Station Construction Mitigation




Arbutus Station Construction Mitigation

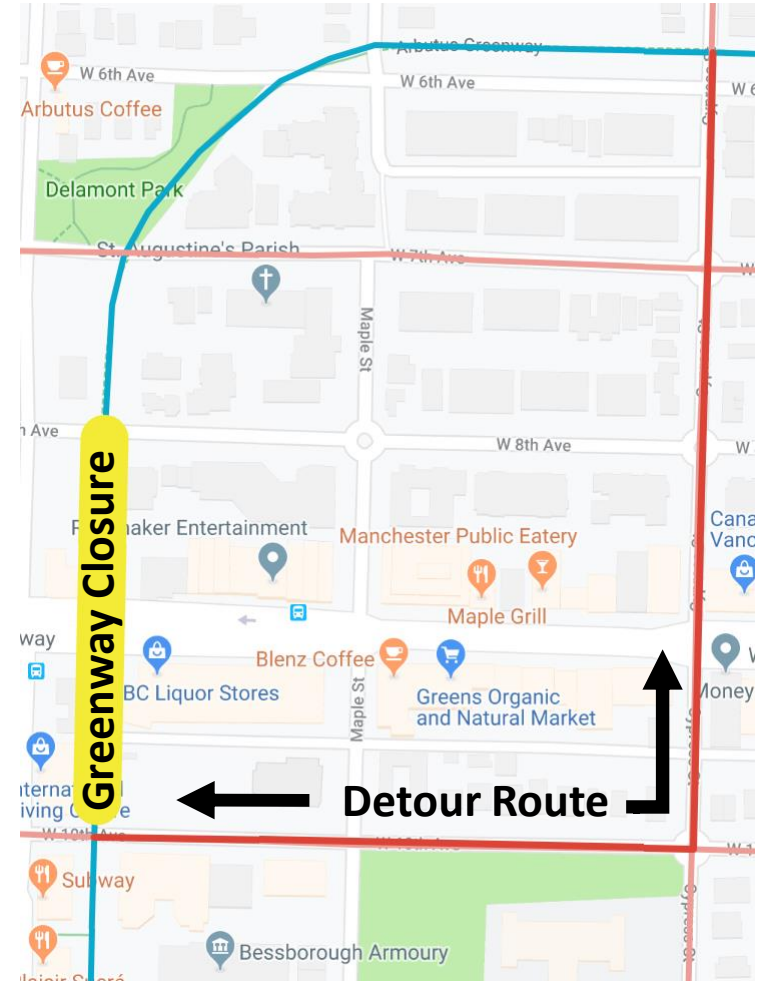

Park Board Van Play

- Cycling in Parks
- To and Through
- Developing an asset inventory
- Setting asset targets

Prior St Collector and Rail Crossing

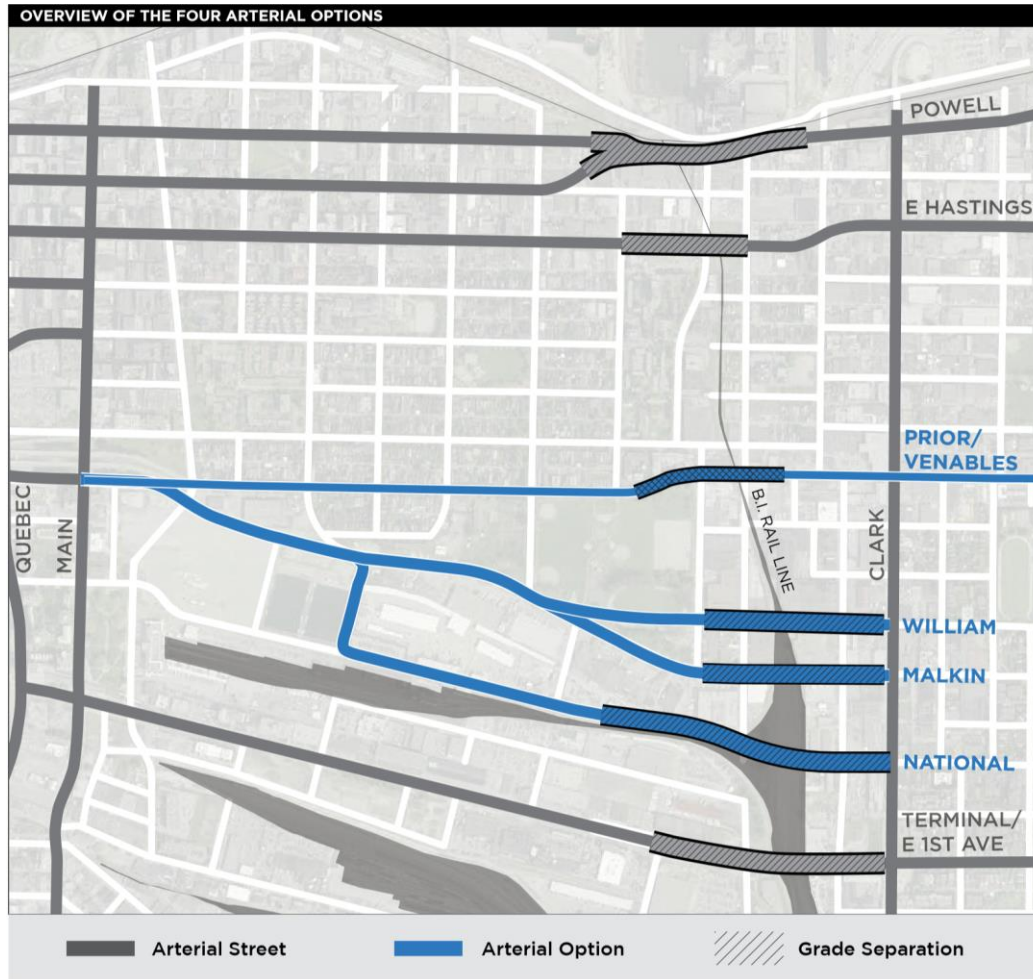

- Four arterial options evaluated
- Community Panel recommendation for National/Charles
- Staff recommendation for Prior/Venables (now approved by council) due to cost issues

Proposed Underpass (conceptual)




Seawall Detour at Hornby




- Part of the Seaside Bikeway, but on private (strata) property with a public right of way
- Extended construction in the rotunda due to building damage from the tree; route is currently blocked to through passage
- Detour on the seawall for people walking and cycling
- City will follow up on improvements to the detour route

Appendices

Vancouver Bike Lanes (Van Map)

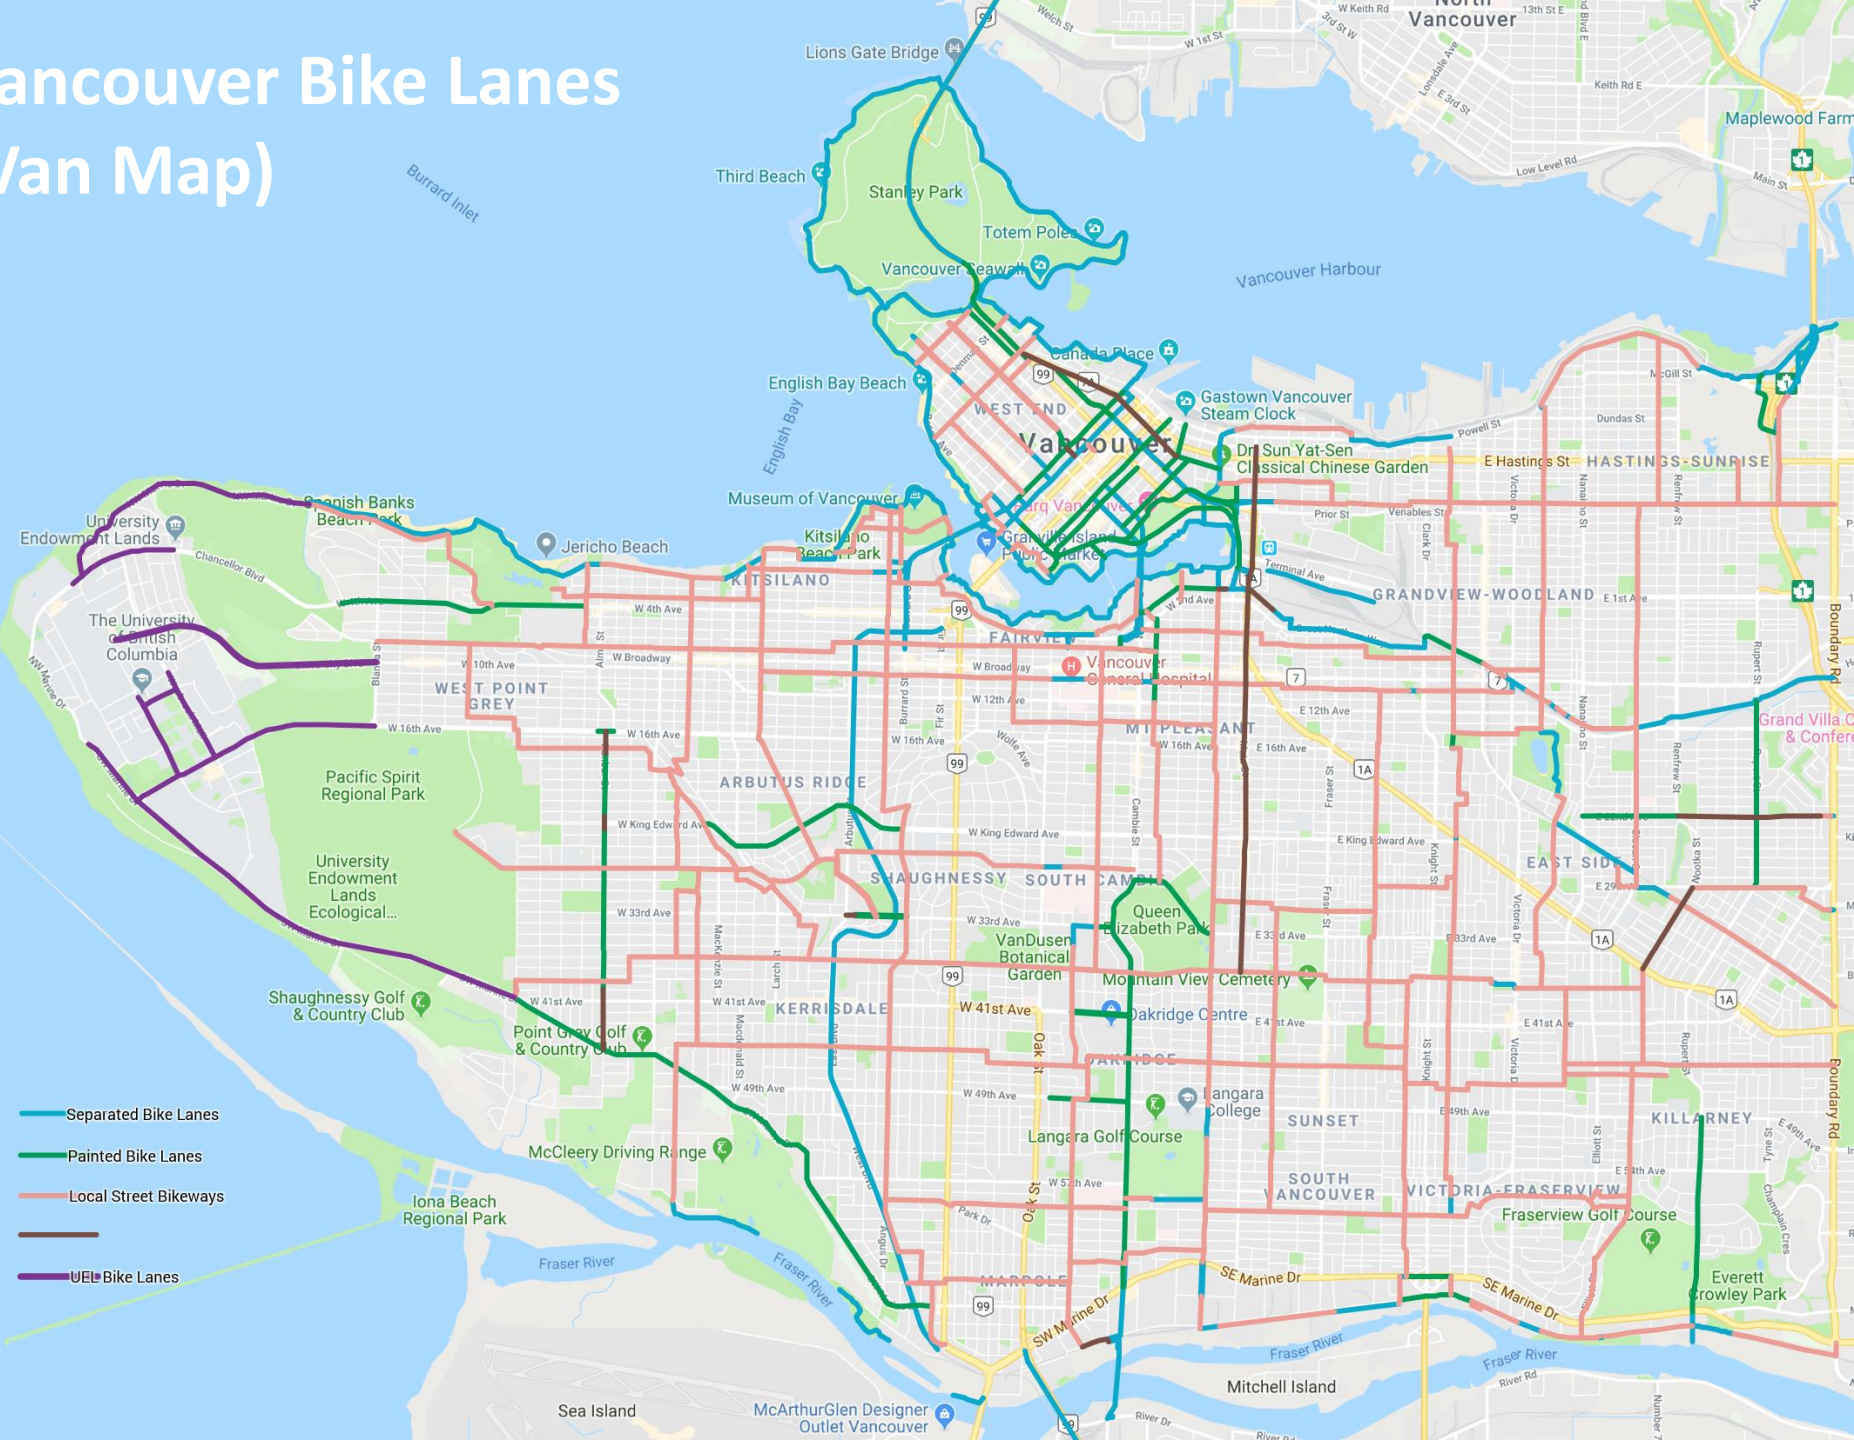

Vancouver Bike Lanes And HUB Gaps

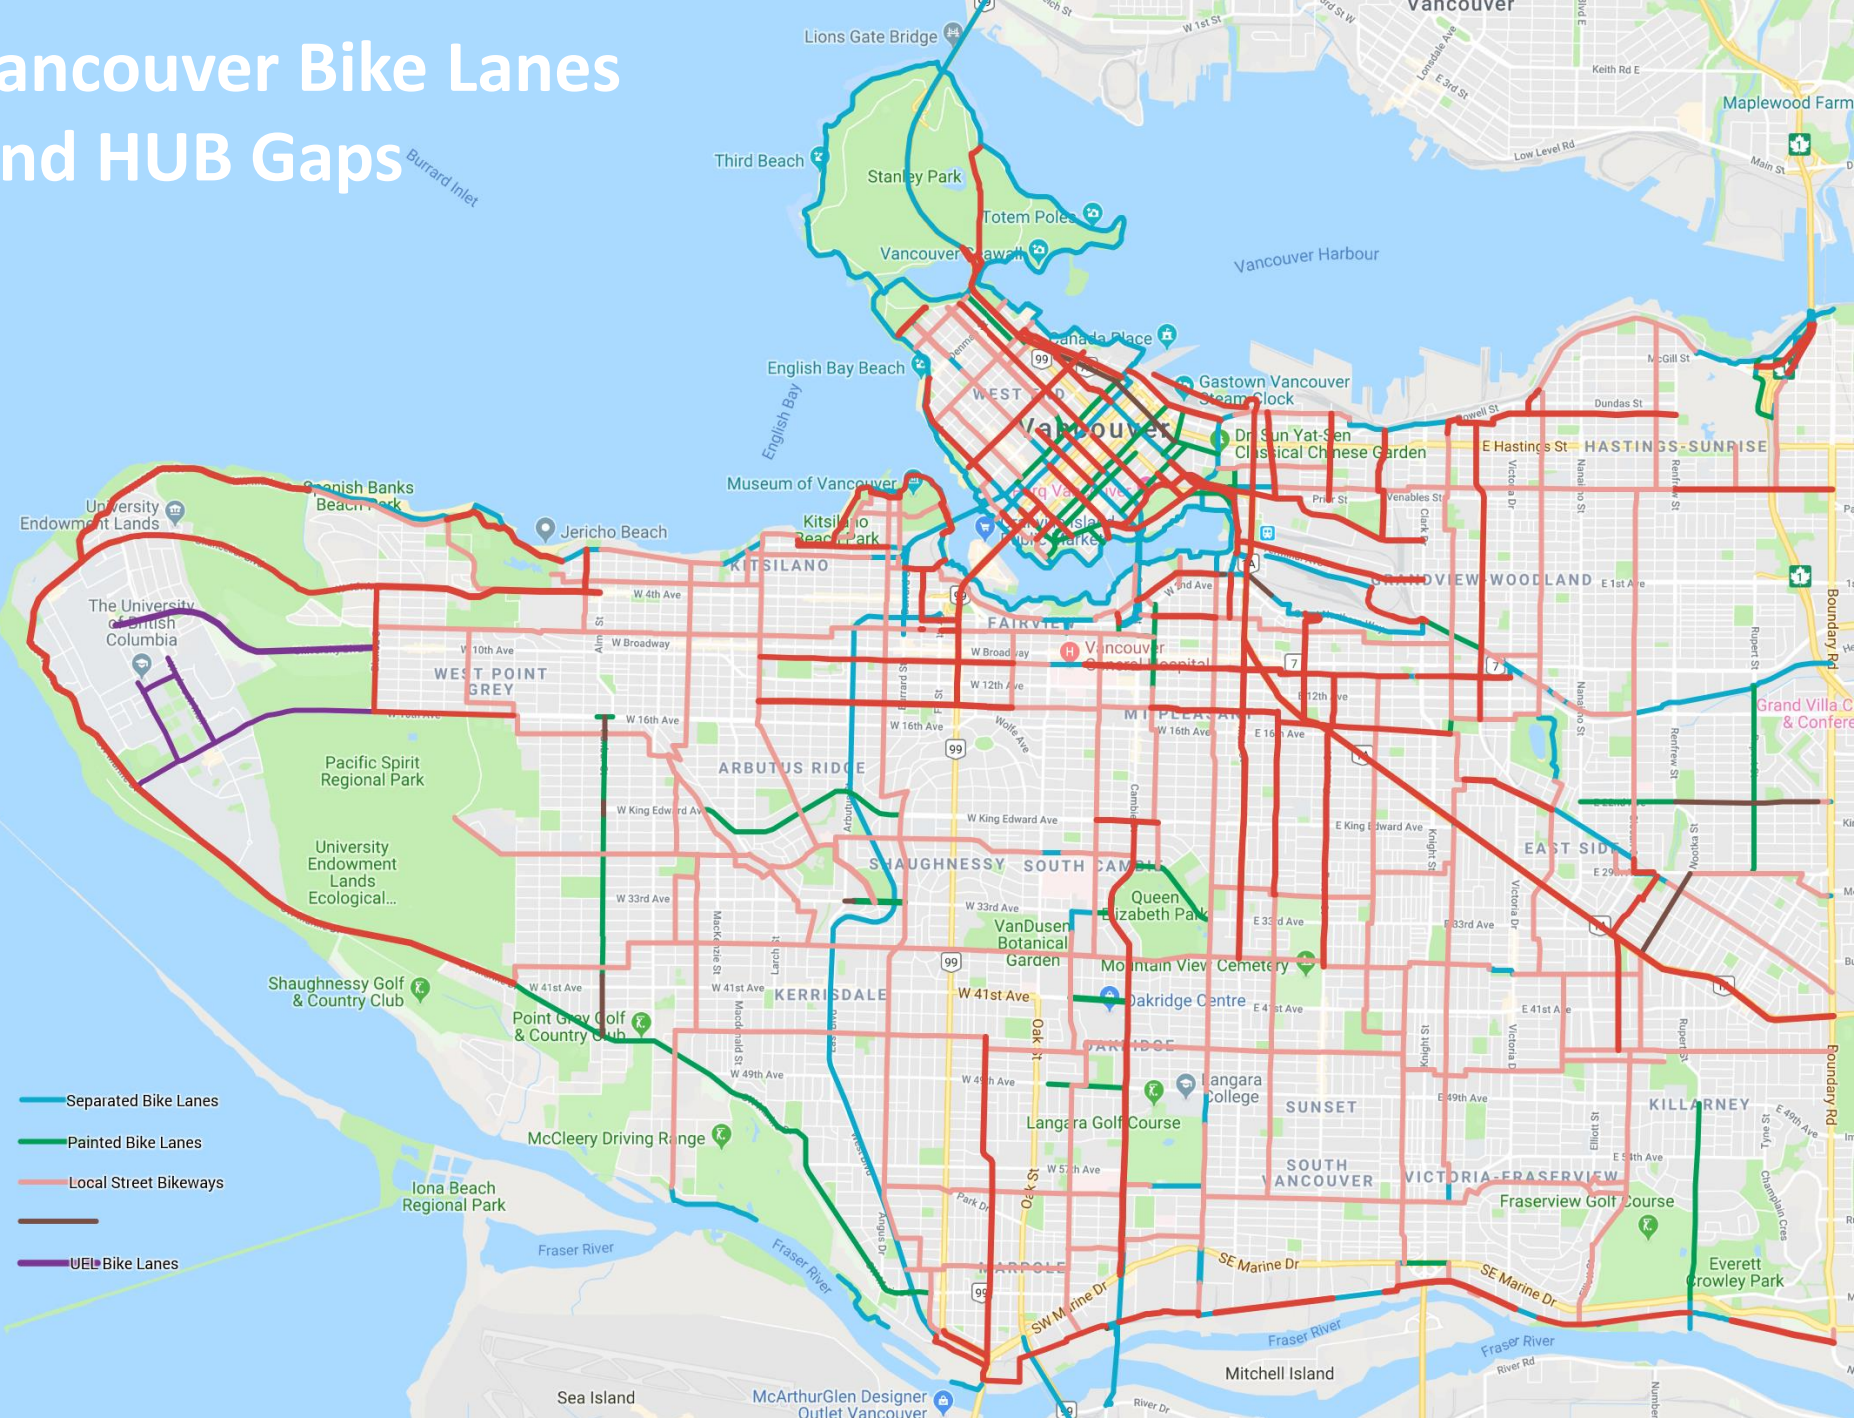


5-Year Cycling Network: Additions & Upgrades 2018-2022

Added Nov 2017

Detailed alignment and timing subject to change.
 The aspiration for new routes and route upgrades is All Ages & Abilities (AAA). However, this may not always be achievable in the near term.
 Upgrades can range from a series of small spot improvements to more significant changes.
 Some projects fall on land outside City jurisdiction (e.g. Port, Park Board) and are subject to outside approval.
 Not shown: minor additions and improvements through redevelopment and road work.

Planned Routes	
1	Park Lane*
2	Bute
3	Drake
4	Smithe
5	Nelson
6	West Waterfront Road**
7	Water-Alexander-Powell
8	Granville Bridge
9	Gore
10	Hudson
11	Kent
12	Commercial
13	Blanca
14	14th Ave
15	St. George Rainway
16	Duchess-Wales*
17	Helmcken
18	King Edward
19	Pandora-Semlin
20	Prince Edward
21	Quebec
22	Cambie
23	Stainsbury
Planned Upgrades	
A	Smithe
B	Nelson
C	Cambie Bridge
D	Highbury
E	Cypress
F	5th Ave
G	Ontario
H	Adanac
I	BC Parkway
J	10th Ave
K	Richards
L	Cambie
M	Georgia
N	1st Ave
O	Kent


- Planned Route
- Planned Upgrade
- AAA Network
- Protected Bike Lane
- Local Street Bikeway
- Painted Bike Lane
- Shared Use Lane

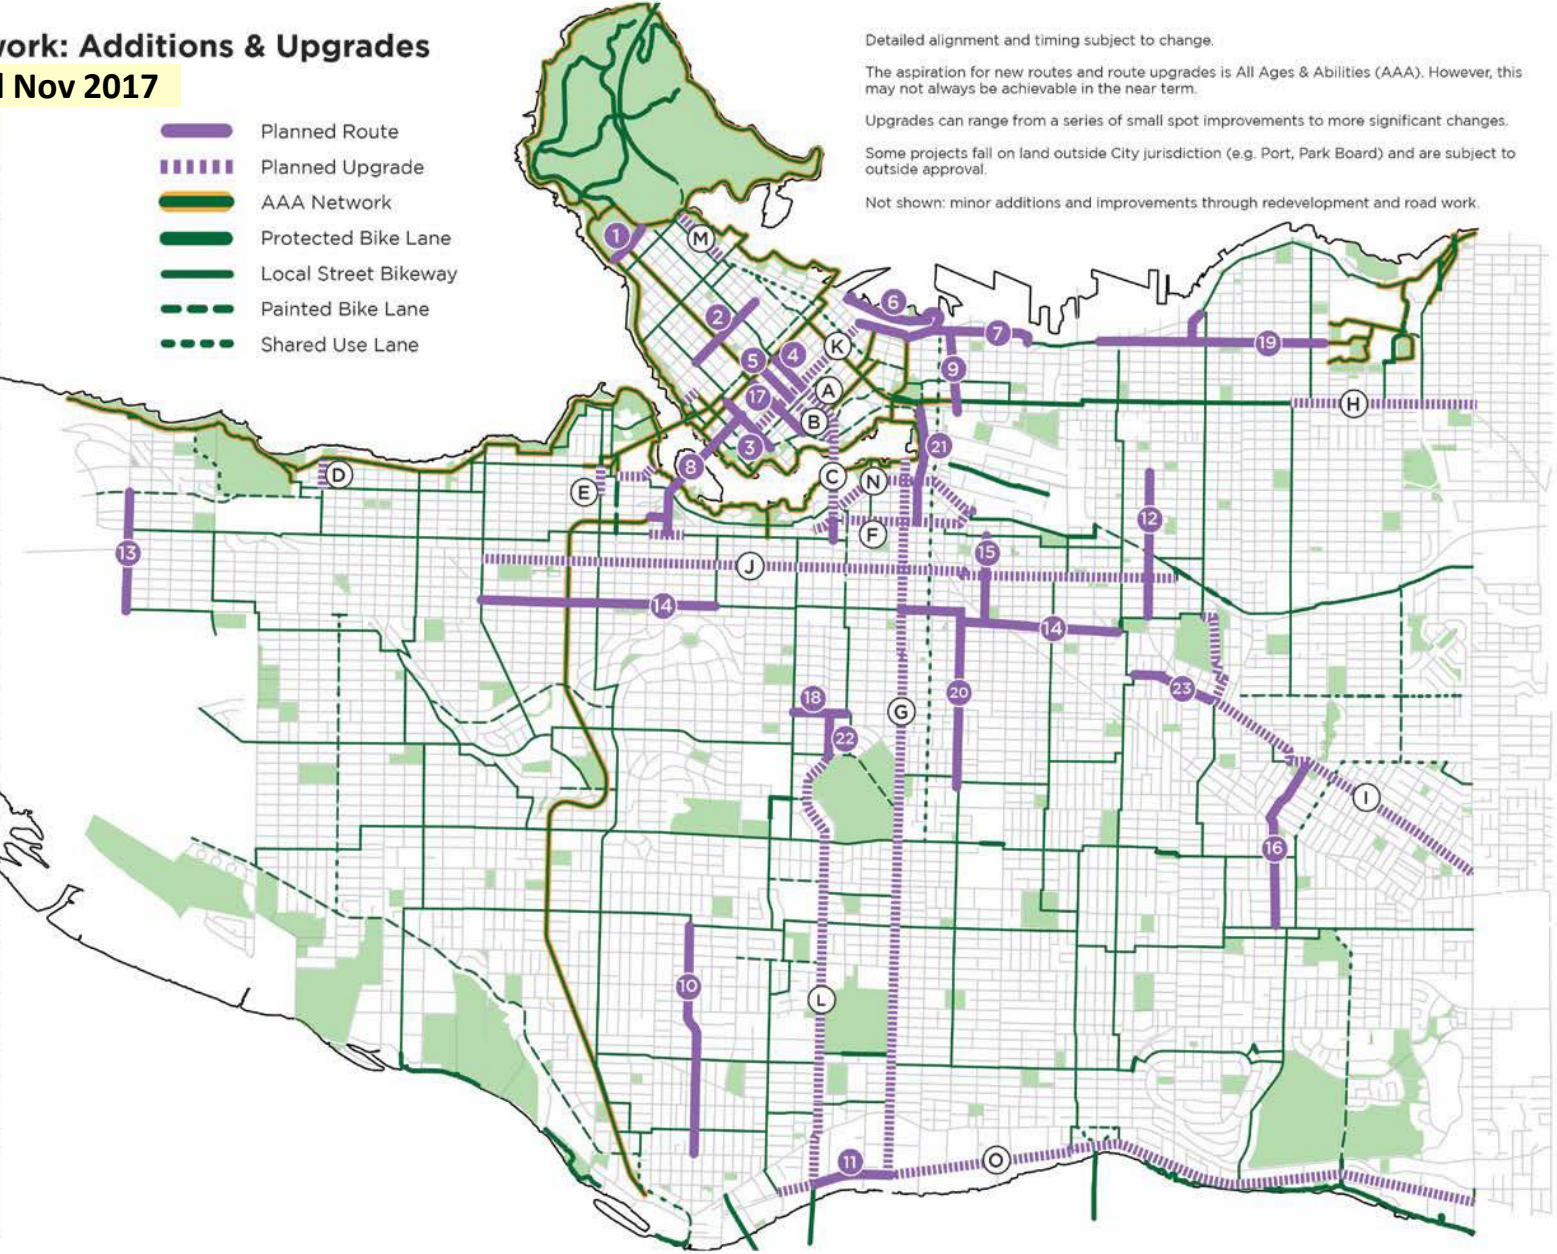

* Park Board jurisdiction
 ** Port Authority jurisdiction
 Number/Letter sequence does not imply priority

Translink Major Bikeway Network (MBN)

APPROVED BY THE REGIONAL TRANSPORTATION ADVISORY COMMITTEE - JUNE 27, 2018

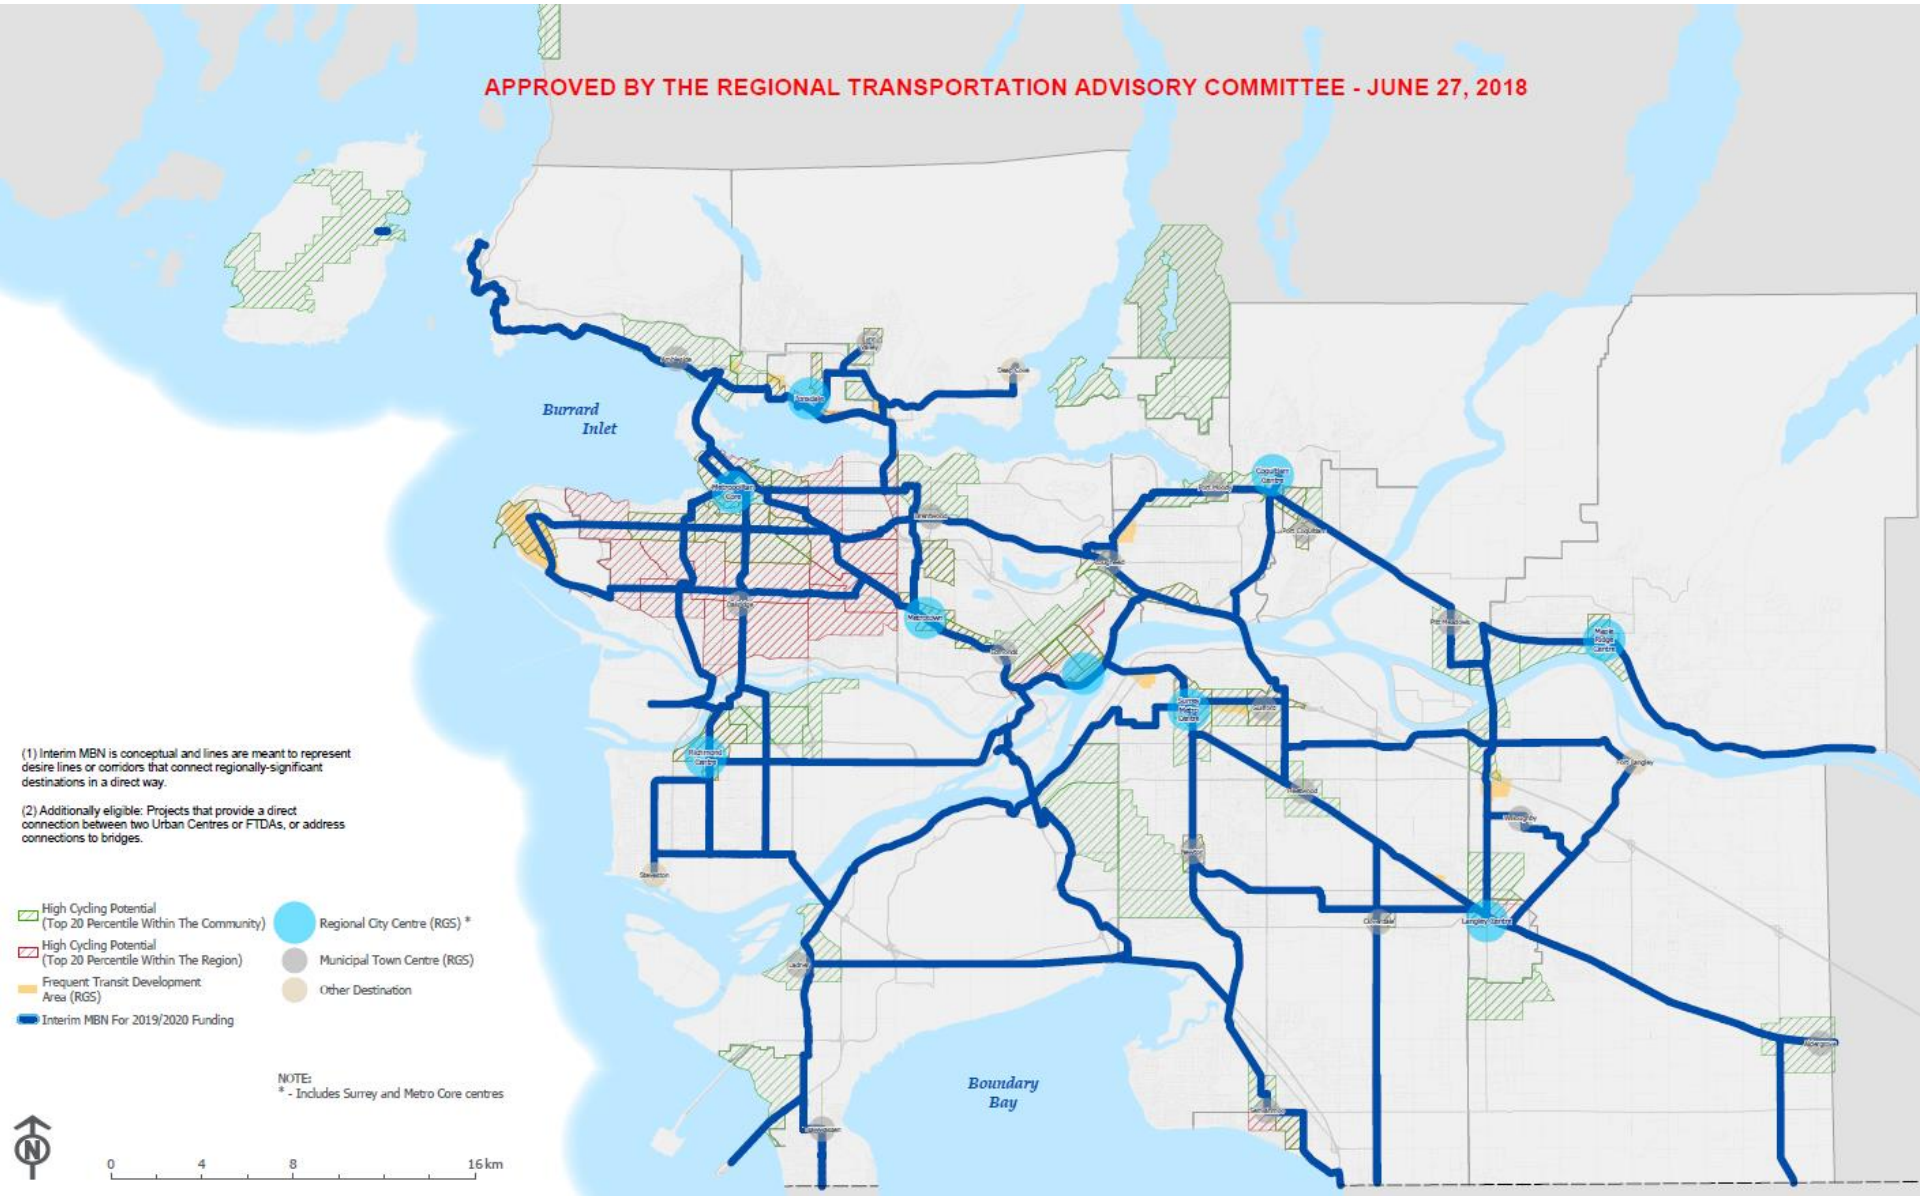


(1) Interim MBN is conceptual and lines are meant to represent desire lines or corridors that connect regionally-significant destinations in a direct way.
(2) Additionally eligible: Projects that provide a direct connection between two Urban Centres or FTDA's, or address connections to bridges.

- High Cycling Potential (Top 20 Percentile Within The Community)
- High Cycling Potential (Top 20 Percentile Within The Region)
- Frequent Transit Development Area (RGS)
- Interim MBN For 2019/2020 Funding
- Regional City Centre (RGS) *
- Municipal Town Centre (MGC)
- Other Destination

NOTE:
* - Includes Surrey and Metro Core centres



Great Blue Heron Way

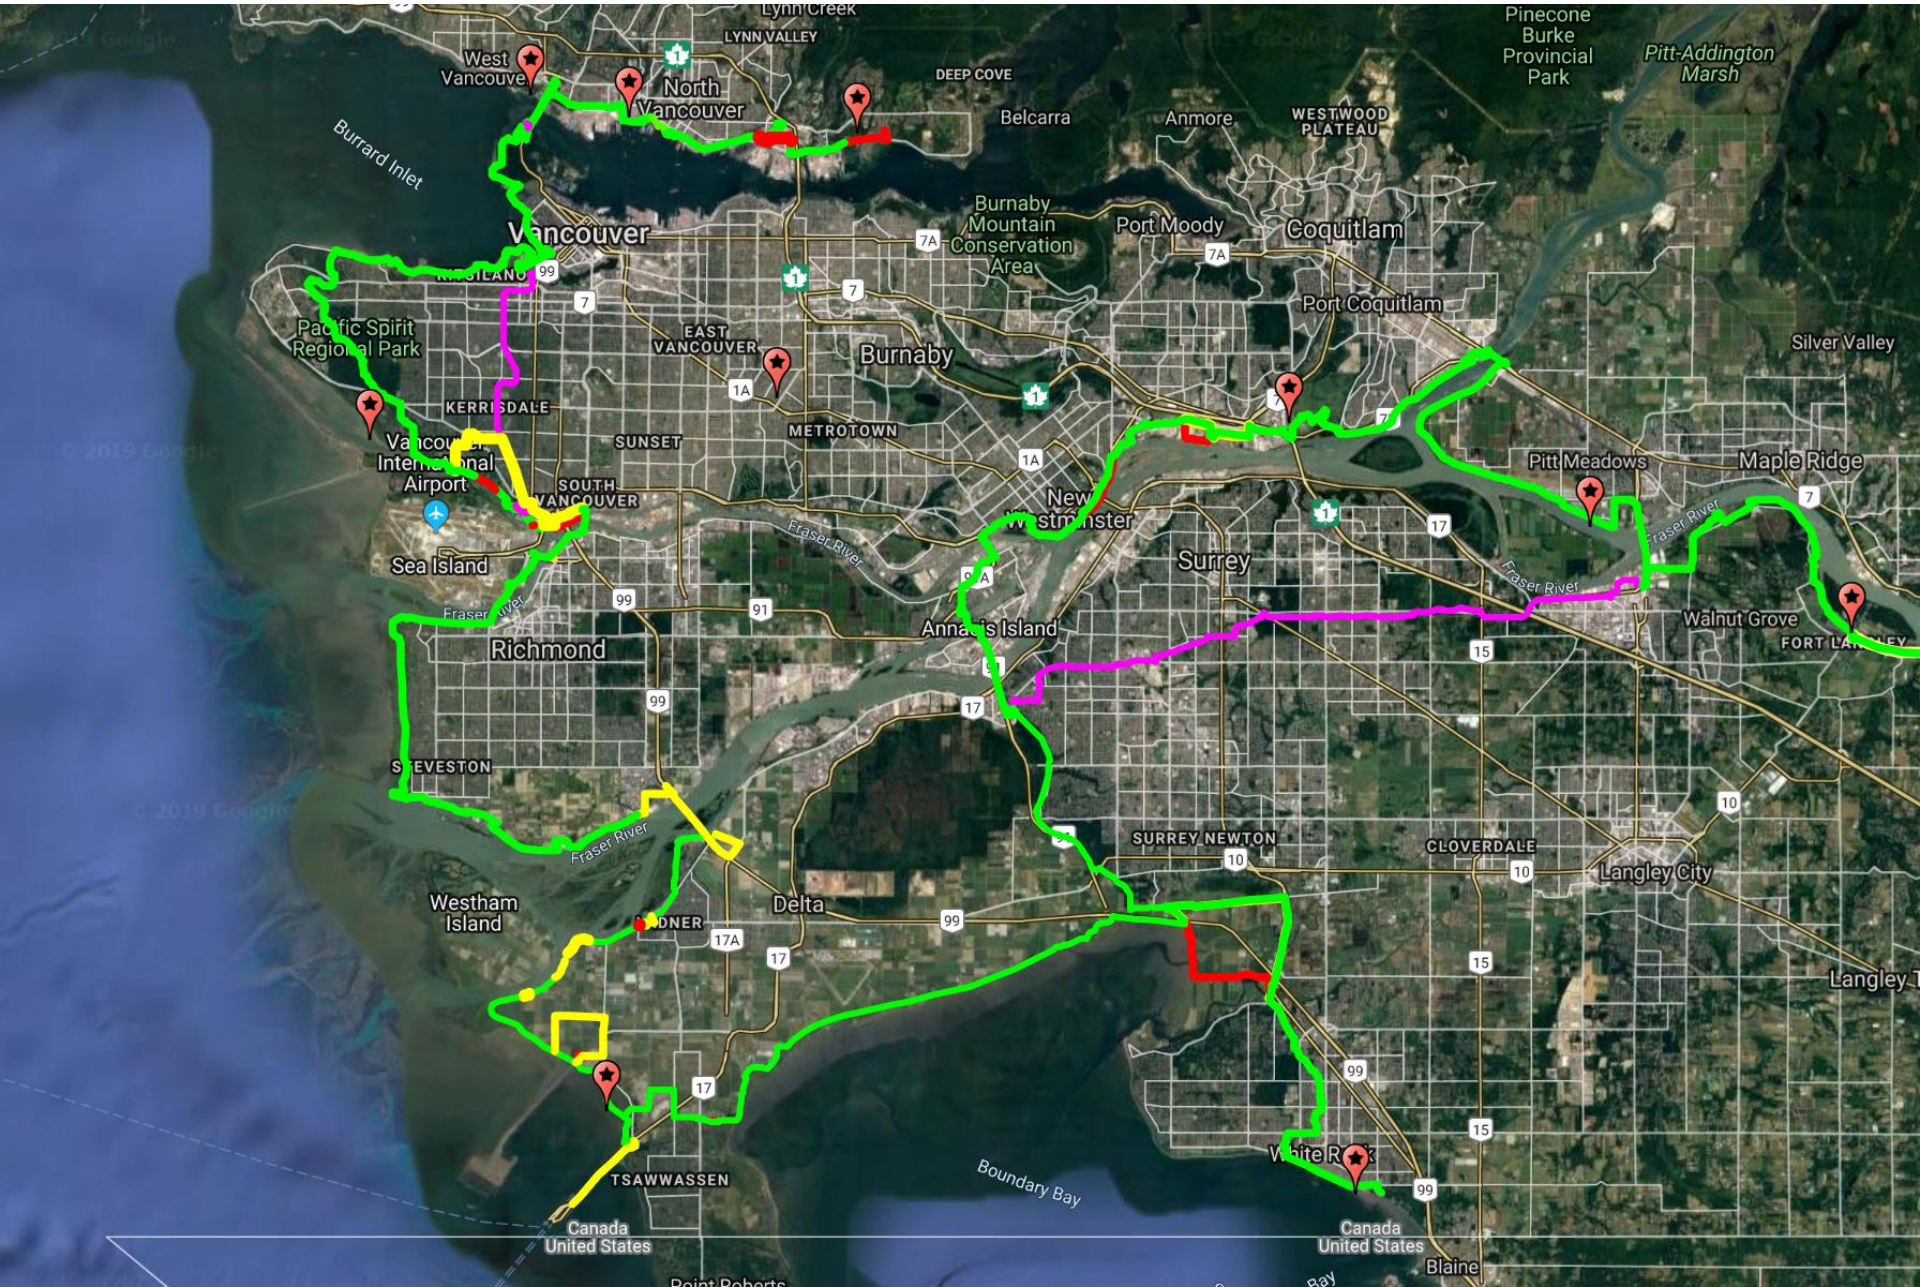

Type *	Class A** (Comfortable for most people)	Class B (Comfortable for some people)	Class C (Comfortable for few people)	Notes
Separated from vehicle traffic				
1 Bike Path: Off-road facility for the exclusive use of people cycling, may be unidirectional or bidirectional. Separate from both motorists and pedestrians, but designed based on bicycles operating in parallel with pedestrians, especially at intersections.	Width: Bidirectional 3.1-4.8 m, Unidirectional 2.1-3.0 m Posted Speed: N/A Volume: N/A	Width: Bidirectional 2.4-3.0 m, Unidirectional 1.5-2.0 m Posted Speed: N/A Volume: N/A	More narrow widths and unpaved facilities would be unclassified but may be shown on a regional cycling map	When in a road right of way (ROW): A bike path should fall outside of the Clear Zone (>1.2 m on roadways with posted speeds of <60 km/h - see Transportation Association of Canada Geometric Design Guide (TAC GDG), Table 7.3.1 for higher speed roads). Further, designs of bike paths should avoid obstacles in the pathway, include adequate sight lines and lighting, be direct, and avoid the use of rigid bollards. If cyclist volumes exceed 1,500 per day then recommended facility widths shall be >3.6 m bidirectional, and >2.4 m unidirectional. Bike Path's are generally appropriate near higher speed roads.
2 Protected Bike Lane: Exclusive on-road facility delineated by a vertical barrier element/physical separation from motor vehicles, as well as separation from pedestrians. Can be unidirectional or bidirectional	Width: Bidirectional 3.1-4.8 m, Unidirectional 2.1-3.0 m Posted Speed: ≤60 km/h Volume: N/A	Width: Bidirectional 2.4-3.0 m, Unidirectional 1.5-2.0 m Posted Speed: ≤80 km/h Volume: N/A	More narrow widths would be unclassified but may be shown on a regional cycling map	Separation from vehicles by delineator (curbs, bollards, concrete barriers, etc.) is required. Type of delineator dependent on speed and volume of traffic (for specific details see TAC GDG Chapter 5, section 5.7.5). Parking may provide additional barrier beyond the delineator - at a minimum curbstops over 100 mm high are necessary with periodic gaps for drainage and wheelchair access. Width of delineator is 0.30-1.0 m. If adjacent to parking, min separation is >0.80 m (Class A), >0.60 m (Class B). Volume: If motor vehicle ADT is greater than 4,000, this facility is more acceptable than others. If cyclist volumes exceed 1,500 per day then recommended facility widths shall be >3.6 m bidirectional, and >2.4 m unidirectional.
3 Multi-Use Path (MUP): Off-road facility that allows for shared use by people cycling and pedestrians.	Width: Bidirectional 4.0-6.0 m, Unidirectional bikes 3.0-4.0 m Posted Speed: N/A Volume: N/A Paved	Width: Bidirectional 3.0-3.9 m, Unidirectional bikes 2.4-2.9 m Posted Speed: N/A Volume: N/A Paved	Width: Bidirectional 2.7-2.9 m, Unidirectional bikes 2.1-2.3 m Posted Speed: N/A Volume: N/A Unpaved	MUP's are not intended to replace a sidewalk where there is sufficient motor vehicle or pedestrian and bicycle traffic that may lead to high rates of conflict. As a guide, MUPs are not appropriate when pedestrian and bicycle traffic volumes exceed a total peak hour volume of 200 users or where motor vehicle volumes on the parallel roadway exceed 4,000 ADT. MUPs are generally appropriate near higher speed roads. A MUP should fall outside of the Clear Zone (>1.2 m on roadways with posted speeds of <60 km/h - see TAC GDG, Table 7.3.1 for higher speed roads). Further, designs of MUPs should avoid obstacles in the clear zone, include adequate sight lines and lighting, be direct, and avoid the use of rigid bollards.
Unseparated from vehicle traffic				
4 Neighbourhood Street Bikeway or Shared Roadway: Bikes and motor vehicles share the roadway, which provides a continuous corridor of suitable operating conditions for people cycling, including limiting exposure to motor vehicle traffic. Can include a variety of roadways including local roads, alleys and service roads.	Width: Parking one side 5.5 - 7.5 m, parking both sides 8.0 - 11.0 m Posted Speed: ≤30km/h Volume: ≤1,000 ADT Traffic control at all major intersections designed to be bicycle activated. Traffic diversion and traffic calming preferred.	Width: Parking one side 5.5 - 7.5 m, parking both sides 8.0 - 11.0 m Posted Speed: ≤30km/h Volume: ≤2,000 ADT Traffic control at all major intersections designed to be bicycle activated. Traffic diversion and traffic calming preferred.	Width: varies, depending on road type Posted Speed: ≤50 km/h Volume: ≤3,000 ADT	Traffic diversion can include such treatments as directional and median barriers. Traffic calming can include such treatments as raised crossings, and bicycle permeable humps and chicanes. All such facilities should include shared lane markings to indicate the potential presence and positioning of people cycling. Municipalities are encouraged to limit posted speeds to 30 km/h on all Neighbourhood Street Bikeways and Shared Roadways. Widths: If curb less than 100 mm, or parking along curb, gutter pan can be included in width. Otherwise, width excludes gutter pan.
5 Bike Lane: On-road facility adjacent to a curb or a parking lane and delineated from motor vehicles with paint markings.	Never	Width: 1.8 - 2.4 m Posted Speed: ≤50 km/h Volume: ≤4,000 ADT Absence of curbside parking.	Width: 1.5-1.7 m Posted Speed: <60km/h Volume: N/A Presence of curbside parking permitted. If present, a buffer should be included btwn parking and bike lane. Combined curbside parking & buffer should be >3.0 m.	If parking present or speeds/ volumes might exceed limits or over 1,500 people cycling per day, protected bikeway recommended. Widths: If curb less than 100 mm, or parking along curb, gutter pan can be included in width. Otherwise, width excludes gutter pan.
6 Bike Accessible Shoulder: Signed and marked, paved area with no curb, located to the right of roadway general purpose travel lanes, and separated from general purpose lanes by white edge line or painted buffer. Usually in rural areas. May be shared with pedestrians.	Never	Width: 1.8-2.4 m Posted Speed: <50 km/h Volume: ≤4,000 ADT	Width: 1.5-1.7 m Posted Speed: <90 km/h If speeds >60km/h, buffer required between bicycle and vehicle lanes Volume: N/A	Parking not permitted in bikeway. If speeds/ volumes exceed limits, or over 1,500 people cycling per day protected bikeway recommended Width for buffered facility: 2.4-3.5 m total, bike lane 1.8-2.4 m

* In all cases pavement markings (bicycle stencils) and signage are necessary at regular intervals and should be placed 20 to 30 metres in advance of, and following each intersection and other decision points, or every 400 m when intersections are not present.

** Those facilities that do not meet the criteria for Classes A, B and C will be considered unclassified bikeway facilities. Such facilities should be upgraded over time to meet criteria for designated bikeways.